



IMPORTANT

PROCEDURES FOR LOW LUBE FIFTH WHEELS

1. ADJUST THE TRAILER HEIGHT SO THE FIFTH WHEEL SLIDES FREELY UNDER THE TRAILER.

DO NOT LIFT THE TRAILER WITH THE FIFTH WHEEL
THIS WILL STRETCH THE LOW LUBE PLATES

2. THE FRONT EDGE OF THE TRAILER UPPER COUPLER MUST HAVE A RADIUS OR A CHAMFER (SEE FIGURE 1).

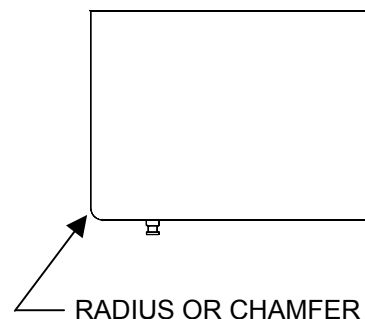


FIGURE 1

3. IF POSSIBLE KEEP THE FIFTH WHEEL FROM EXTENDED SUNLIGHT EXPOSURE AT ELEVATED TEMPERATURES.
MAY CAUSE LUBE PLATES TO EXPAND AND PUCKER BETWEEN BOLTS